Hardware Components

Seni Smart incontinence product with sensor strip

With Clip: Detects urine and movement.

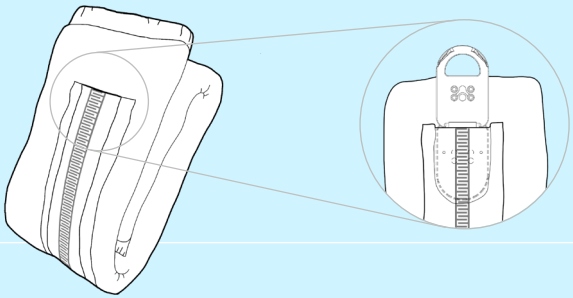

Clip pocket of the Seni Smart incontinence product

Connects Clip and sensor strip.

Clip

Gets attached to the Seni Smart incontinence product and recognizes data from the sensor strip, e.g. urine levels.

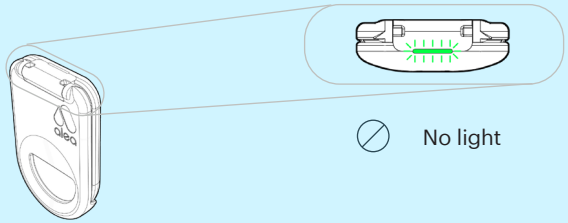

Clip-LED

The LED light indicates that the Clip status has changed.

No light	Clip is not working. *Solutions: A) Check battery in app* *B) Clean Clip* *C) Different incontinence product* *D) Contact support*

Clip ↔ Incontinence product

Green	Clip successfully connected (after few seconds).
Blue *(flashing)*	Clip seeks connection. After a few seconds status changes to green or red.
Red / no light	Clip could not connect. *Solutions: A) Plug in and out.* *B) Briefly place Clip in Docking Station for reset.* *C) Take new Clip.* *D) Take new incontinence product.* *E) Clean Clip.* *F) Contact support.*

Docking Station

Charges the Clips and sends the data to the AssistMe Cloud, where they get converted into care information.



Node

Supports the Docking Station and ensures smooth data transfer in all areas of the care facility.



Clip ↔ Docking Station

Green *(3x flashing)*	Clip battery fully charged. Can be used for up to 16 hours.
Yellow *(3x flashing)*	Clip battery mid. Usage is possible, full charge recommended.
Red *(3x flashing)*	Clip battery low. Charging is recommended before use.

TZMO Deutschland GmbH, Waldstraße 2, 16359 Biesenthal | seni-smart@tzmo.de

AssistMe GmbH | Bachstr. 12, 10555 Berlin | support@assistme.io

Hardware Handling

Assign the Clip to a resident



Insert the Clip into the Docking Station of the new resident – LED lights up pulsing.

Attach the Clip to the incontinence product

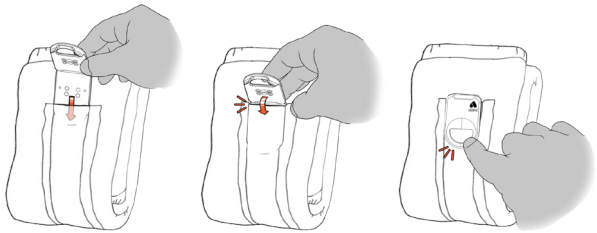

Insert the Clip into the front or back pocket of the fresh incontinence product – LED briefly lights up green. Then put on the incontinence product.

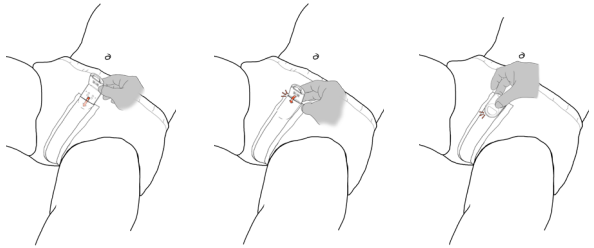

It is also possible to put the incontinence product on the resident before attaching the Clip.

Open the Clip



Open the Clip with index finger and thumb.

Dispose of the used incontinence product

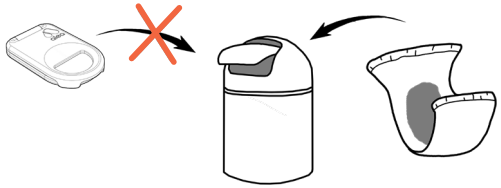

Remove Clip from the incontinence product, clean it, and enter it into the Docking Station. Dispose of the incontinence product in the trash as usual. Do NOT dispose of the Clip.

Clean the Clip

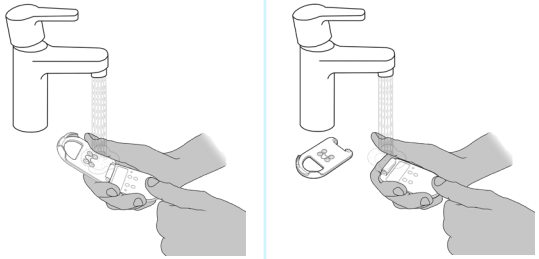

Wash the Clip under running water, then disinfect it. Disassemble, if necessary.

Dissassemble the Clip



Open the Clip by 90°.
Then pull the two parts apart.

Charge the Clip



Insert clip into the Docking Station and charge for at least 30 min.

TZMO Deutschland GmbH, Waldstraße 2, 16359 Biesenthal | seni-smart@tzmo.de

TZMO Deutschland GmbH member of TZMO GROUP

AssistMe GmbH | Bachstr. 12, 10555 Berlin | support@assistme.io

ASSISTME